


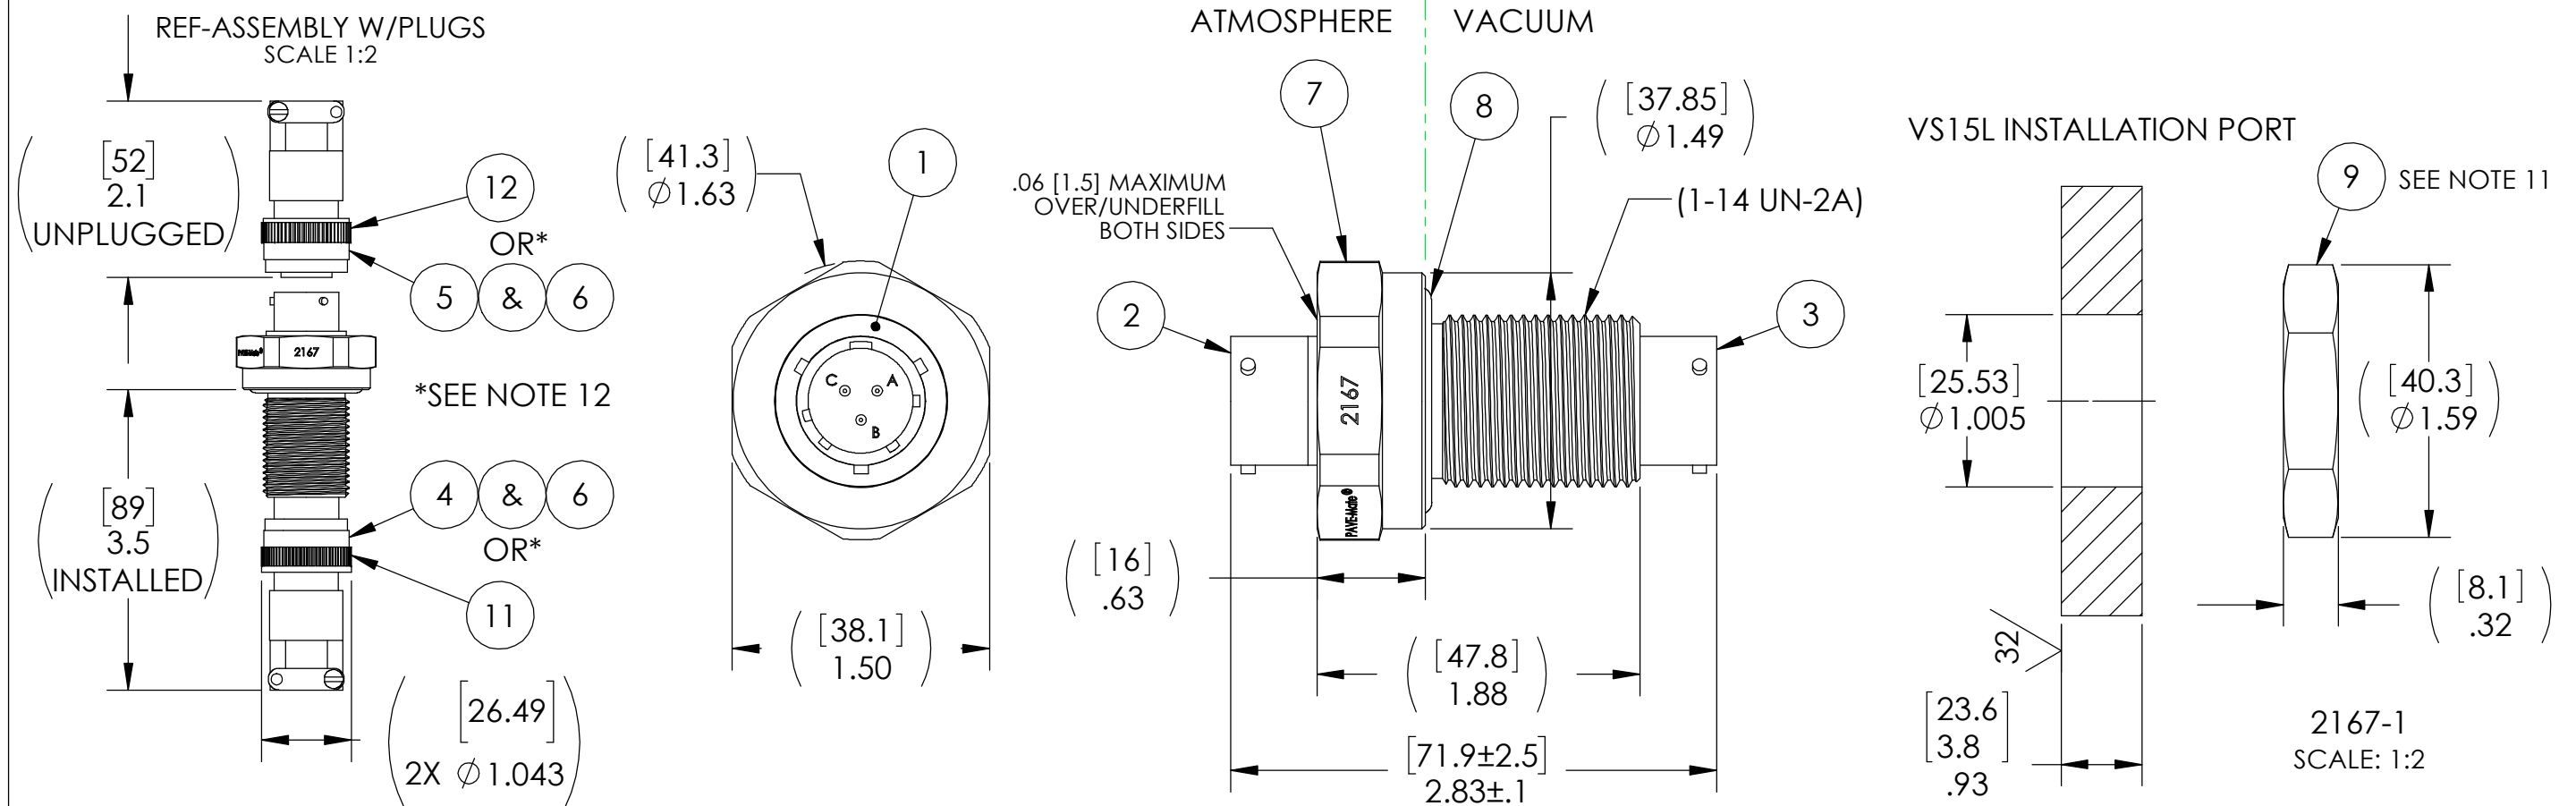

NOTES:

1. HE LEAK TEST @ 1 ATM 1X10⁻⁶ CC/SEC OR LESS. A GREEN PAINT DOT ON THE ATMOSPHERE SIDE INDICATES THE PART HAS PASSED THE TEST.
2. HYPOT 1000 VDC 500 MEGOHMS MINIMUM 0.01 SECOND MINIMUM PIN TO PIN & HOUSING WITH MATING CONNECTORS.
3. CONTINUITY TEST <0.5 OHM PIN TO SOCKET WITH MATING CONNECTORS.
4. ALL TEST ARE PERFORMED AT ROOM TEMPERATURE.
5. ALL PARTS MUST PASS ALL TESTS.
6. COSMETIC SURFACE VOIDS NOT ON O-RING SEALING SURFACES ARE ACCEPTABLE BASED ON THE SEAL'S DIAMETER:
 <= .5 [12.7] SEAL DIAMETER: ϕ .035 [8.9] MAX ALLOWED VOID SIZE
 > .5 [12.7] SEAL DIAMETER: ϕ 0.060 [1.5] MAX ALLOWED VOID SIZE
7. REF-OPERATING TEMPERATURE RANGE -20 °C TO 125 °C.
8. DIMENSIONS ARE INCHES [millimeters].
9. ALCOHOL OR FOMBLIN YVAC 3 MAY BE USED TO LUBRICATE O-RINGS FOR VACUUM HELIUM LEAK TESTING.
10. PAVE-SEAL CAN BE A BI-DIRECTIONAL HERMETIC SEAL FOR VACUUM AND MOST PRESSURES. FOR PRESSURES ABOVE 150 PSI (10 BAR), CHECK WITH SALES ENGINEERING.
11. 2167-1 ONLY: SHIPS INSTALLED AND LEAK TESTED, PER NOTE 1, IN ITEM 10 (NW40 ADAPTER) AND DOES NOT INCLUDE ITEM 9 (JAM NUT).
12. 2167 ONLY: INCLUDES ITEMS 4, 5, & 6 (CRIMP PLUGS & STRAIN RELIEFS). 2167-1 ONLY: INCLUDES ITEMS 11 & 12 (SOLDER CUP PLUGS W/STRAIN RELIEFS).

12	1	SC3116F12-3S	SEE NOTE 12 PLUG 3#16 GOLD PLATED COPPER ALLOY SOCKETS W/ SOLDER CUP NICKEL PLATED ALUMINUM SHELL W/ STRAIN RELIEF
11	1	SC3116F12-3P	SEE NOTE 12 PLUG 3#16 GOLD PLATED COPPER ALLOY PINS W/ SOLDER CUP NICKEL PLATED ALUMINUM SHELL W/ STRAIN RELIEF
10	1	5119	SEE NOTE 11 HOUSING NW40-SS VS15 ADAPTER
9	1	0183	SEE NOTE 11 NUT VS15-SS
8	1	-215 VITON	O-RING -215 VITON 75
7	1	0161	HOUSING VS15L-SS
6	2	M85049/52-1-12N	SEE NOTE 12 STRAIN RELIEF CLAMP SHELL SIZE 12, STRAIGHT, NON SELF-LOCKING, NICKEL PLATED ALUMINUM
5	1	MS3476L12-3S	SEE NOTE 12 PLUG 3#16 GOLD PLATED COPPER ALLOY CRIMP SOCKETS, RIGID DIELECTRIC INSERT, SILICONE GROMMET, NICKEL PLATED ALUMINUM SHELL
4	1	AE776L12-3P-460	SEE NOTE 12 PLUG 3#16 GOLD PLATED COPPER ALLOY CRIMP PINS, EPOXY INSERT, NICKEL PLATED ALUMINUM SHELL
3	1	AE771L12-3S-460	RCPT 3#16 GOLD PLATED COPPER ALLOY SOCKETS, EPOXY INSERT, NICKEL PLATED ALUMINUM SHELL
2	1	SC3112E12-3P	RCPT 3#16 GOLD PLATED COPPER ALLOY PINS, NEOPRENE INSERT, NICKEL PLATED ALUMINUM SHELL
1	A/R	PAVE-Seal 150	EPOXY BLACK
ITEM	QTY	PART NUMBER	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ±0.5
 X.X DECIMAL ±0.1 X.XX DECIMAL ±0.02 X.XXX DECIMAL ±0.005
 ANGLES ±1 DEGREE SURFACE FINISH 128 microinch RMS

PAVE technology co.

2751 Thunderhawk Court
Dayton, OH 45414-3445
U.S.A.
tel (937) 890-1100
fax (937) 8905165
www.pavetechnologyco.com

DESCRIPTION
VS15L-SS-150-3-16-3112PS

PART NUMBER 2167 SEE NOTES 11 & 12

MATERIAL NOTED

REVISION LEVEL D

PROJECTION