
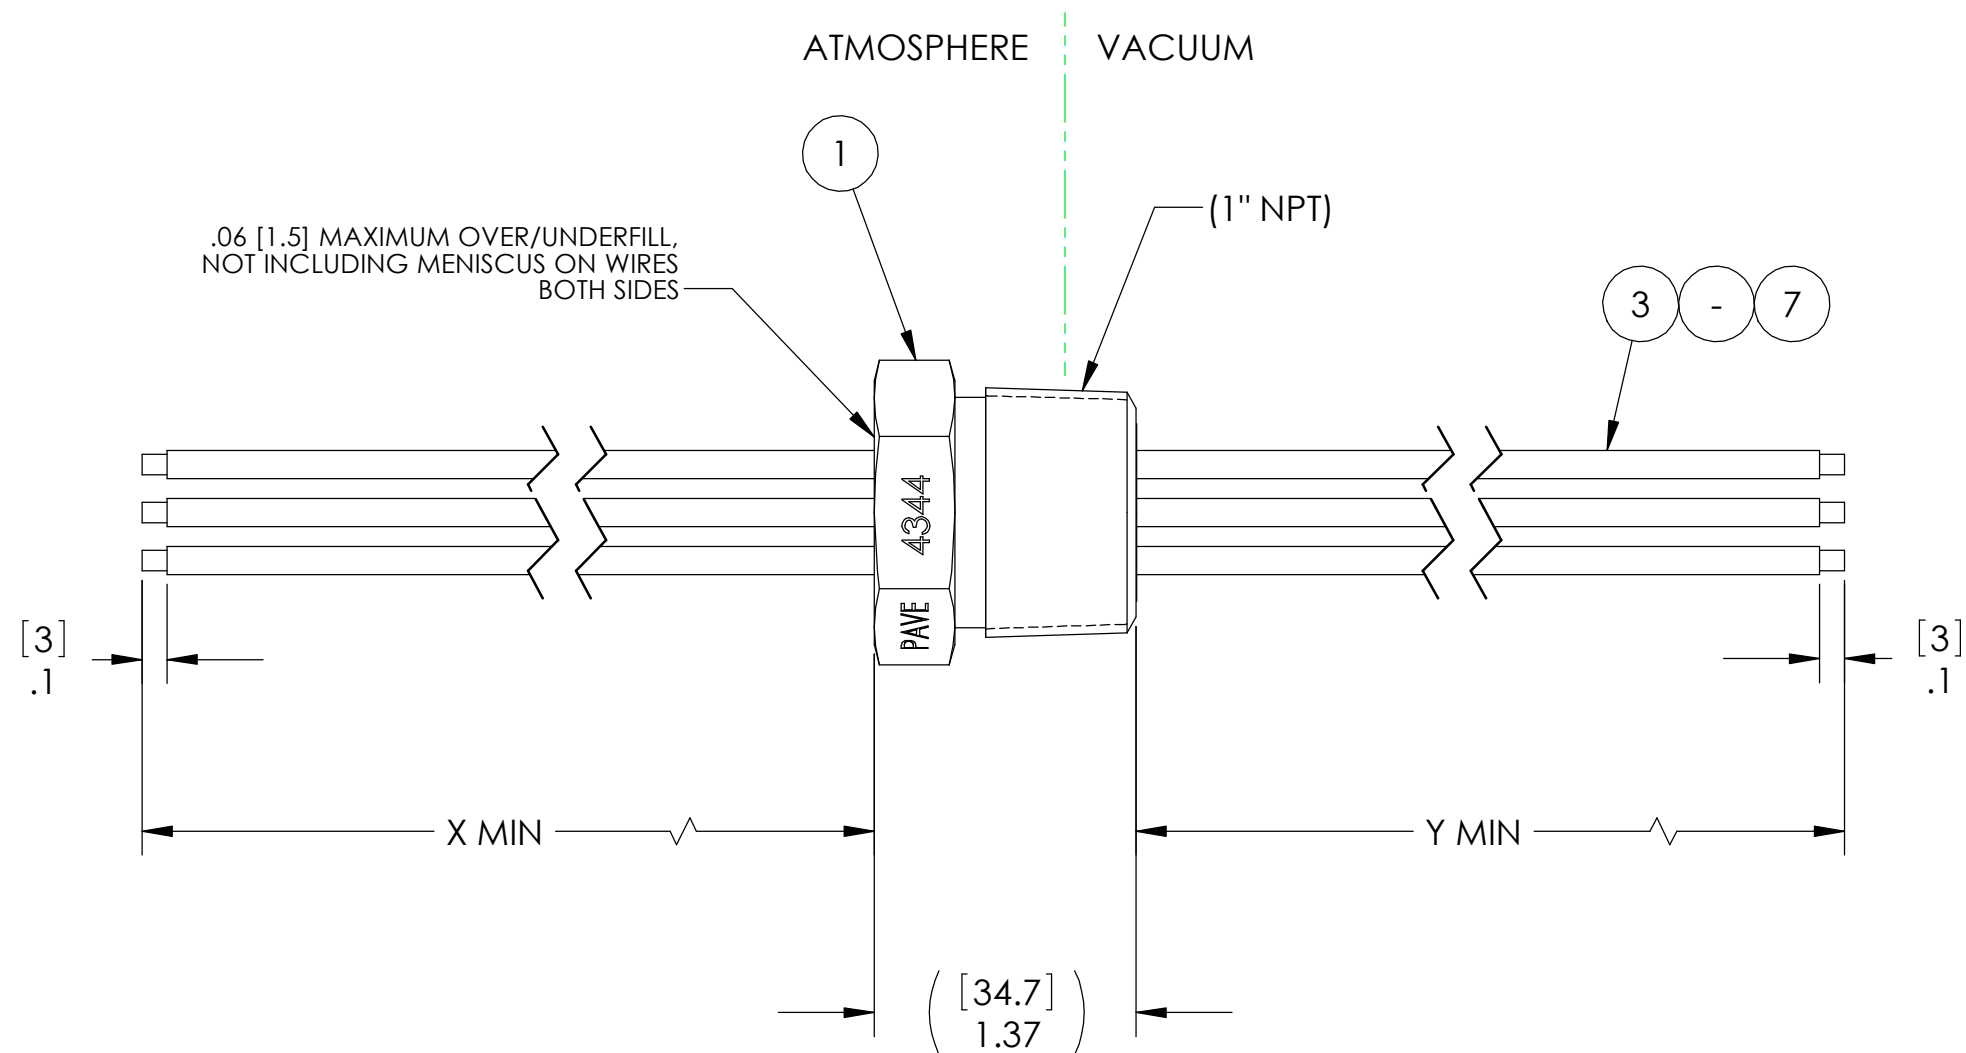


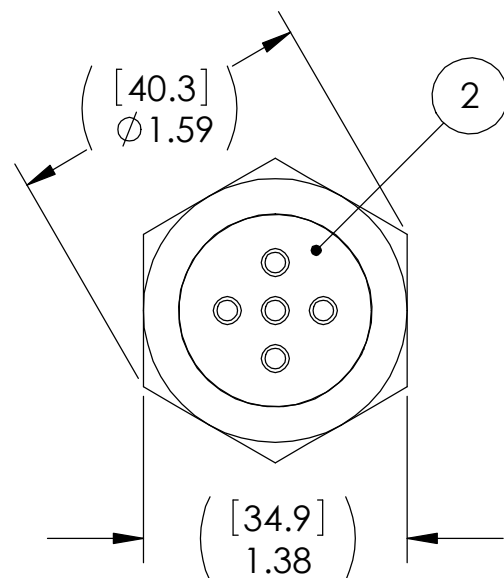

NOTES:

1. HE LEAK TEST @ 1 ATM. 1X10⁻⁶ CC/SEC OR LESS. A GREEN PAINT DOT ON THE ATMOSPHERE SIDE INDICATES THE PART HAS PASSED THE TEST.
2. HYPOT 630 VDC 500 MEGOHMS MINIMUM 0.01 SECOND MINIMUM WIRE TO WIRE AND HOUSING.
3. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
4. ALL PARTS MUST PASS ALL TESTS.
5. WIRE POSITIONING IS APPROXIMATE & VARIABLE.
6. COSMETIC SURFACE VOIDS NOT ON O-RING SEALING SURFACES ARE ACCEPTABLE BASED ON THE SEAL'S DIAMETER:
 <= .5 [12.7] SEAL DIAMETER: Ø.035 [.89] MAX ALLOWED VOID SIZE
 > .5 [12.7] SEAL DIAMETER: Ø.060 [1.5] MAX ALLOWED VOID SIZE
7. REF-OPERATING TEMPERATURE RANGE -20°C TO 125°C.
8. DIMENSIONS ARE INCHES [millimeters].
9. PAVE-SEAL CAN BE A BI-DIRECTIONAL HERMETIC SEAL FOR VACUUM AND MOST PRESSURES. FOR PRESSURES ABOVE 150 PSI (10 BAR), CHECK WITH SALES ENGINEERING.

PAVE#	X	Y
4344	72 [1829]	72 [1829]
4344-1	48 [1219]	120 [3048]

7	1	TZZ10 BLUE	WIRE TZZ10 MIL-W-22759/16-10-6
6	1	TZZ10 WHITE	WIRE TZZ10 MIL-W-22759/16-10-9
5	1	TZZ10 RED	WIRE TZZ10 MIL-W-22759/16-10-2
4	1	TZZ10 GREEN	WIRE TZZ10 MIL-W-22759/16-10-5
3	1	TZZ10 BLACK	WIRE TZZ10 MIL-W-22759/16-10-0
2	A/R	PAVE-Seal 150	EPOXY BLACK
1	1	1625-B	HOUSING PT16-B
ITEM	QTY	PART #	DESCRIPTION

2751 Thunderhawk Court
Dayton, OH 45414-3445
U.S.A.
tel (937) 890-1100
fax (937) 8905165
www.pavetechnologyco.com

DESCRIPTION PT16-B-150-5-TZZ10-X-Y	
PART NUMBER 4344	MATERIAL NOTED
REVISION LEVEL A	PROJECTION ☉

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.
 ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ±0.5
 XX DECIMAL ±0.1 X.XX DECIMAL ±0.02 X.XXX DECIMAL ±0.005
 ANGLES ±1 DEGREE SURFACE FINISH 128 microinch RMS