


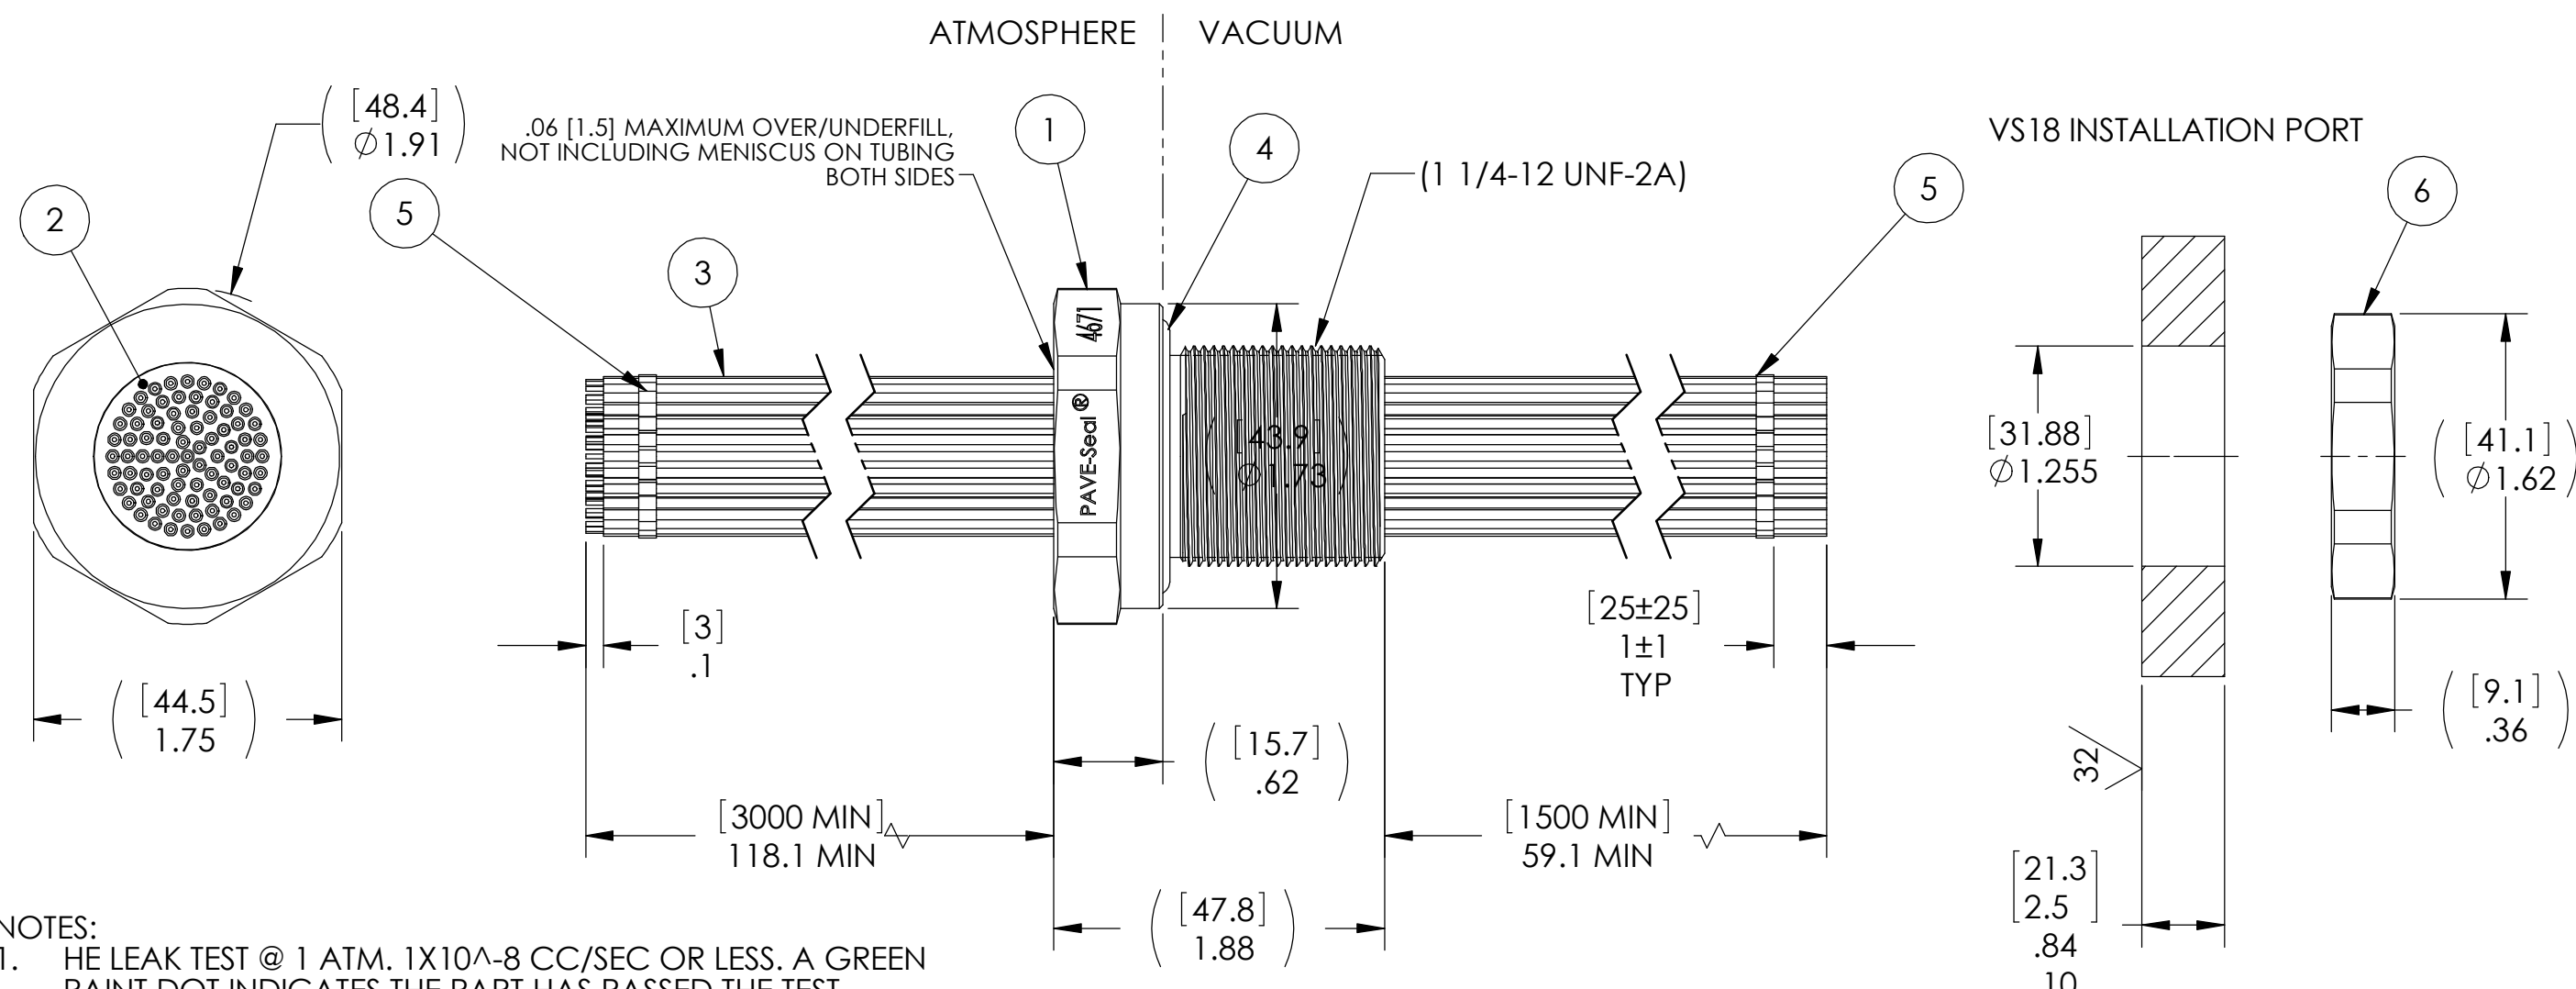

NOTES:

1. HE LEAK TEST @ 1 ATM. 1X10⁻⁸ CC/SEC OR LESS. A GREEN PAINT DOT INDICATES THE PART HAS PASSED THE TEST.
2. HYPOT 1000 VDC 5000 MEGOHMS MINIMUM 0.01 SECOND MINIMUM WIRE TO WIRE AND HOUSING.
3. MINIMUM OF 78 GOOD WIRES (ITEM 3).
4. ALCOHOL OR FOMBLIN YVAC 3 MAY BE USED TO LUBRICATE O-RINGS FOR VACUUM HELIUM LEAK TESTING.
5. ALL TESTS ARE PERFORMED AT ROOM TEMPERATURE.
6. ALL PARTS MUST PASS ALL TESTS.
7. WIRE POSITIONING IS APPROXIMATE & VARIABLE.
8. MARK EACH WIRE ON BOTH ENDS WITH A UNIQUE LETTER OR LETTER COMBINATION (A-Z, AA-ZZ, AAA-ZZZ).
9. COSMETIC SURFACE VOIDS SMALLER THAN Ø0.035 [0.89] ARE ACCEPTABLE.
10. REF-OPERATING TEMPERATURE -40 °C TO 105 °C.
11. DIMENSIONS ARE INCHES [millimeters].
12. PAVE-SEAL CAN BE A BI-DIRECTIONAL HERMETIC SEAL FOR VACUUM AND MOST PRESSURES. FOR PRESSURES ABOVE 150 PSI (10 BAR), CHECK WITH SALES ENGINEERING.

6	1	1014	NUT VS18-SS
5	A/R	FIT-221L 3/32 MK	TUBING SHRINK 3/32" LSZH POLYOLEFIN BLACK WITH WHITE PRINT MARKED A THRU Z
4	1	-219 NITRILE LT	O-RING -219 NITRILE 75 LOW-TEMP
3	81*	E22 WHT *SEE NOTE 3	WIRE 22E MIL-W-16878/4 .010 7/#30 PTFE INSULATED
2	A/R	PAVE-Seal 150	EPOXY BLACK
1	1	0660	HOUSING VS18-SS
ITEM	QTY	PART NUMBER	DESCRIPTION

2751 Thunderhawk Court
Dayton, OH 45414-3445
U.S.A.
tel (937) 890-1100
fax (937) 8905165
www.pavetechnologyco.com

DESCRIPTION
VS18-SS-150-78-TE22-3-1.5m

PART NUMBER
4671

MATERIAL
NOTED

REVISION
LEVEL
C

PROJECTION
⊙

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.
ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ±0.5
X.X DECIMAL ±0.1 X.XX DECIMAL ±0.02 X.XXX DECIMAL ±0.005
ANGLES ±1 DEGREE SURFACE FINISH 128 microinch RMS