


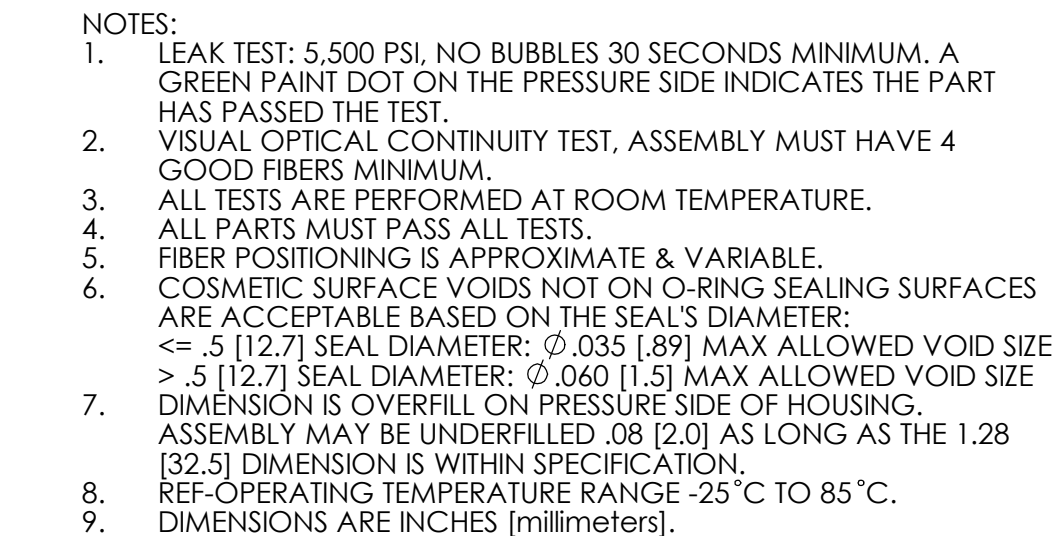

6	2	B-U M8791-1-013	BACK UP RING -013 SINGLE TURN
5	A/R	PARKER O-LUBE	LUBRICANT O-RING BARIUM-BASED
4	3	-013 BUNA	O-RING -013 BUNA 75
3	12	AWG26SW-PTFE	TUBING 26 AWG TEFLON STANDARD WALL
2	6	EZBENDSMFO	FIBER OPTIC SINGLE MODE 9/125/245 EZ-BEND LIGHTERA
1	A/R	PAVE-Seal 200	EPOXY BLACK
ITEM	QTY	PART NUMBER	DESCRIPTION

ALL DIMENSIONS AND TOLERANCES APPLY TO FINISHED PART IN INCHES.
ALLOWABLE TOLERANCES UNLESS SPECIFIED OTHERWISE: NONE ± 0.5
X.X DECIMAL ± 0.1 X.XX DECIMAL ± 0.02 X.XXX DECIMAL ± 0.005
ANGLES ± 1 DEGREE SURFACE FINISH 128 microinch RMS

SP9/128 INSTALLATION PORT
USE SWAGELOK SS-8-TA-1-8ST TO RETAIN ASSEMBLY

PAVE technology co. 2751 Thunderhawk Court
Dayton, OH 45414-3445
U.S.A.
tel (937) 890-1100
fax (937) 8905165
www.pavetechnologyco.com

DESCRIPTION	SP9/128-E-200-6-SMFO-96-96
-------------	----------------------------

	PART NUMBER
--	-------------

6088

MATERIAL	NOTED
----------	-------

REVISION LEVEL	A
-------------------	---

PROJECTION 